




AT-07L

IP INDOOR VIDEO ENTRY PHONE

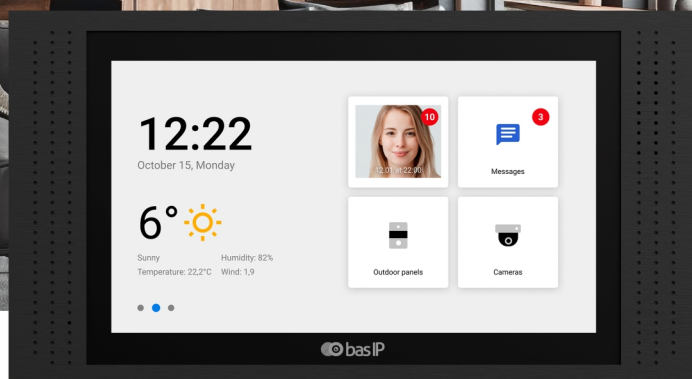

Description

7" IP indoor video entry phone with IPS screen, resolution 1024x600 and the ability to connect alarm sensors.

The indoor video entry phone works on the Android 10 operating system.

It comes in 2 color variations: White, Black and has two installation options: wall mount and flush mount, using a special bracket.

Specifications

Display	7" IPS LCD, capacitive touchscreen
Screen resolution	1024 x 600
Built-in camera	No
Power	PoE and + 12 V DC (PSU not included)
Power consumption	6 W, standby 2.5 W
Wi-Fi	Optional
Dimensions	236 x 128 x 26,5 mm
Colors	Black / White
Body	Aluminum
Installation Type	Wall mount, flush mount with special bracket.

Possibilities of connection

Number of individual panels	Up to 9 panels
Number of multi-apartment panels	Up to 9 panels
Connection of additional monitors	Up to 8 monitors

Additional connectors SD card slot (SDHC)

Memory function Record photo, video and audio to SD card
Interface Multi-language graphical and WEB interface
Number of IP cameras Up to 32 cameras

Main features

 7" IPS LCD touch screen	 Quad splitter
 Android OS	 Slot for SD card
 Lift call	 Ability to install third-party apps
 Concierge call	 Third-party widget support
 Downloading custom MP3 ringtones	 Software update via Ethernet
 High definition video support	 Wall and flush mounting installation

Functional capabilities

Number of call ringtones
Download custom MP3 ringtones
Intercom type
Home automation control
Scene
Answering machine
Support of receiving messages
Multimedia features
Standby mode

Select the type of screensaver
in standby mode

Do Not Disturb
Silent mode
Backup photos taken during the call
Ability to install third-party applications
Support for third-party widgets

Software update


9 melodies to choose
Yes
Audio Intercom, no built-in camera
Light / curtains / lift
Yes
Yes
Yes
View video, photo and audio files from an SD card
Yes, customizable by time

Multi-camera live viewing — up to IP 4 cameras
at the same time
Clock
Photo frame
Live tour view — up to 16 cameras, time adjustable
Single IP camera live viewing.


Yes, customizable by time
Yes, customizable by time
Yes, to the SD card
Yes
Yes

From the web interface
From SD card
From BAS-IP updates server

Color variations

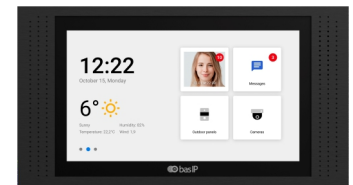


BLACK

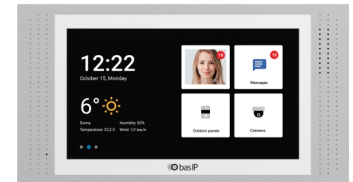


WHITE


Flush mounting

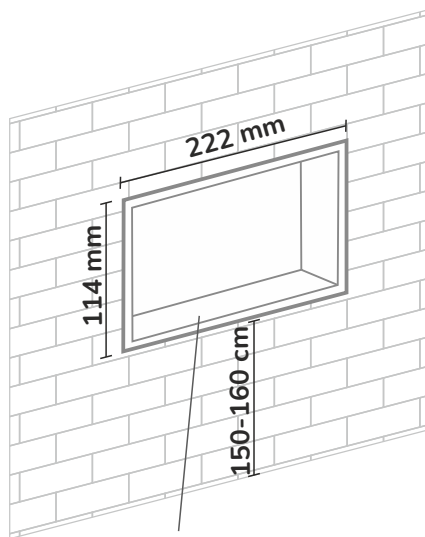

Mounting box

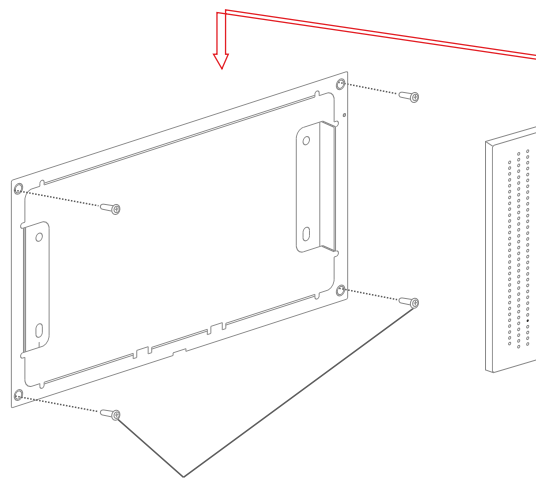


Screws

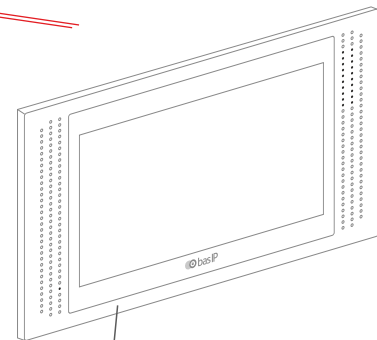


Monitor


Monitor

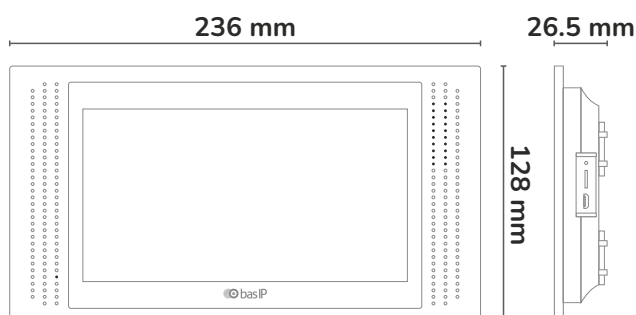


Flush bracket

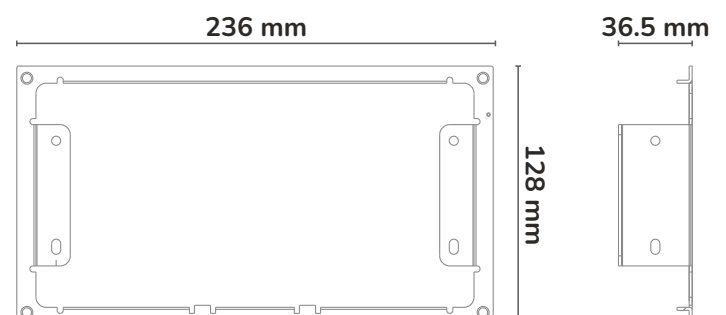

Surface mounting

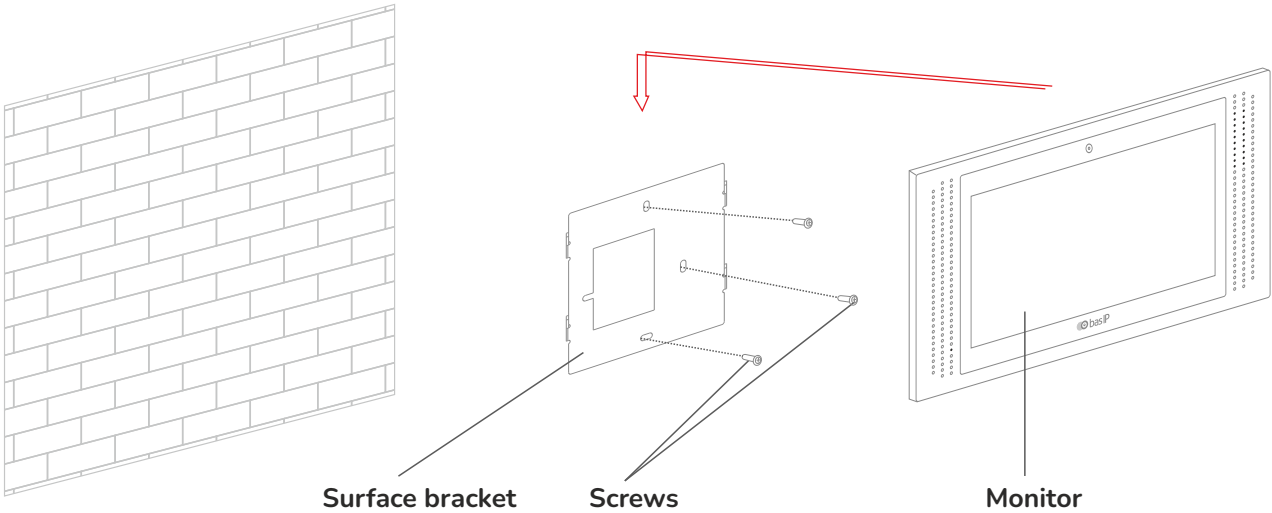

Monitor

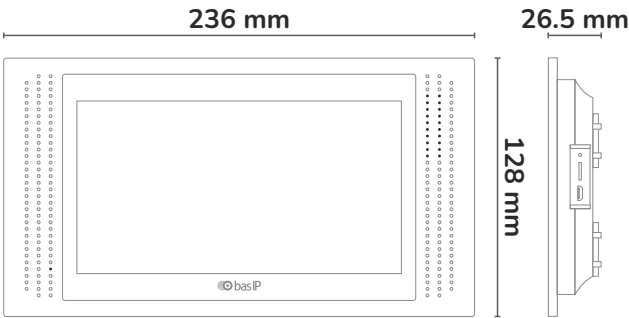

Surface bracket

